


DOUBLE 620

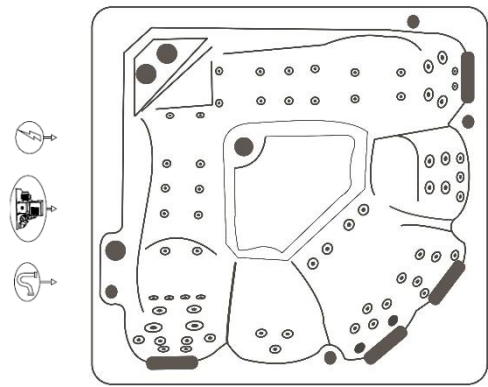

TECHNICAL INFORMATION

Dimensions	2.30 x 2.30 x 0.95 m
Shell	Coril
Panels	EcoWood or Alupanels
Weight without water	450 Kg
Weight with water	2.250 Kg
Volume	5.1m ³

EQUIPMENT SPECIFICATIONS


Seats	6 (2 lounged)
Filter	2 (3.25 m ²)
Water Capacity	1800 l
Drain Valve	1

TECHNICAL SPECIFICATIONS	COMFORT	DELUXE
Jets	68	75
Circulation Pump	1 – 180 W	1 – 180 W
Massage Pump	2 – 1500 W	2 – 1800w
Blower	1 – 1030 W	1 – 1030 W
Disinfection system	Ozone	UV & Ozone
Control box with heater	1 – 3000 W	1 – 3000 W
Illumination	Multipoint	Multipoint

ELECTRICAL SPECIFICATIONS

Voltage	220-240 V ~ or 380-415 V ~	220-240 V ~ or 380-415 V ~
Max Absorbed Power	4210 W	4810 W
Frequency	50 Hz	50 Hz
Amperage	20A or 3x16A	25A or 3x16A

Note : the standard measures may vary ±2cm

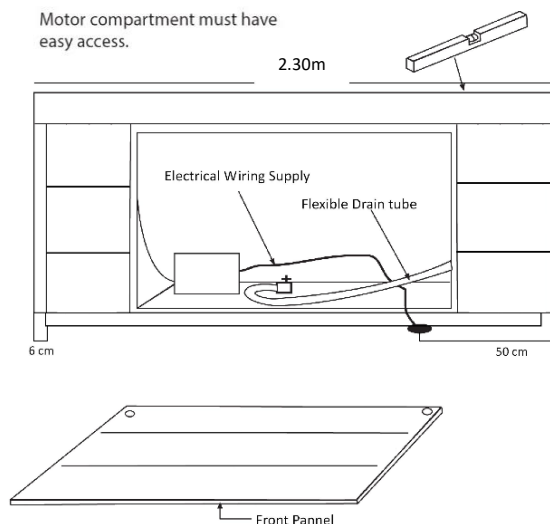

IMPORTANT: Important: The equipment must be connected to an exclusive and permanent power line capable to support installed power. Lighting and electrical receptacles must be located at least 1.5 meters from the equipment.

The circuit ground wire must be provided to take advantage of the designed-in safety features of the equipment.

The electric installation must be in accordance with actual legislation.